
ACM298N

DUAL FULL-BRIDGE DRIVER

一、 DESCRIPTION


ACM298N is a high voltage, high current dual full-bridge driver designed to accept standard TTL logic levels and drive inductive loads such as relays, solenoids, DC and stepping motors.

二、 CHARACTERISTIC


1. OPERATING SUPPLY VOLTAGE UP TO 46 V
2. TOTAL DC CURRENT UP TO 4 A
3. LOW SATURATION VOLTAGE
4. LOGICAL "0" INPUT VOLTAGE UP TO 1.5 V
5. THE LOGIC POWER SUPPLY AND DRIVE POWER SUPPLY ARE
INDEPENDENT OF EACH OTHER

三、 PIN DEFINITION AND FUNCTION

ACM298N adopts 15 wire Multiwatt package

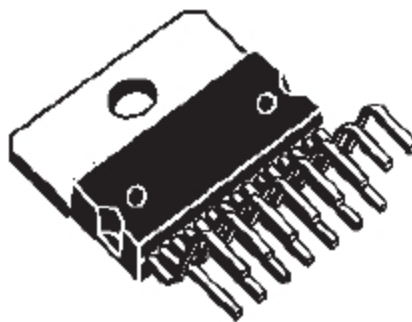


APPEARANCE OF ACM298N

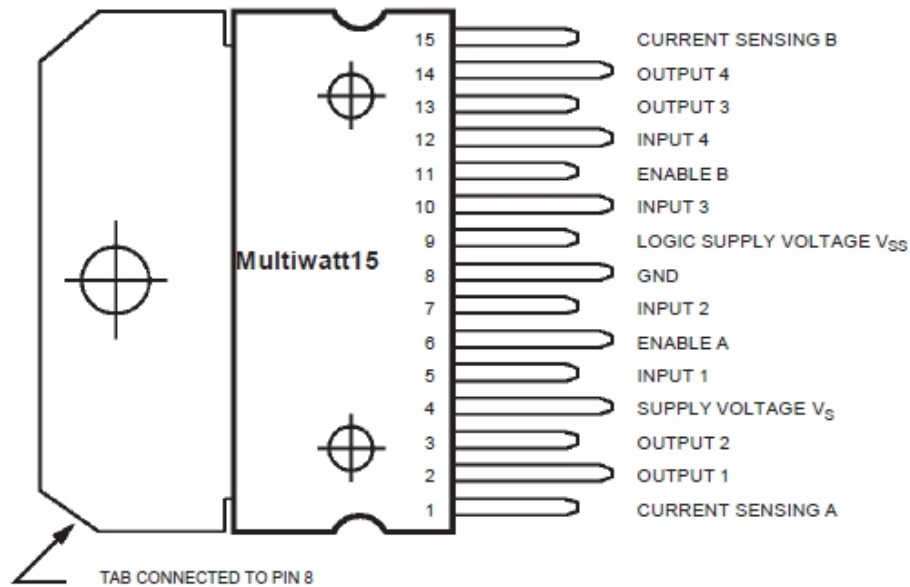

MW.15	Name	Function
1;15	Sense A; Sense B	Between this pin and ground is connected the sense resistor to control the current of the load.
2;3	Out 1; Out 2	Outputs of the Bridge A; the current that flows through the load connected between these two pins is monitored at pin 1.
4	V_S	Supply Voltage for the Power Output Stages. A non-inductive 100nF capacitor must be connected between this pin and ground.
5;7	Input 1; Input 2	TTL Compatible Inputs of the Bridge A.
6;11	Enable A; Enable B	TTL Compatible Enable Input: the L state disables the bridge A (enable A) and/or the bridge B (enable B).
8	GND	Ground.
9	V_{SS}	Supply Voltage for the Logic Blocks. A100nF capacitor must be connected between this pin and ground.
10; 12	Input 3; Input 4	TTL Compatible Inputs of the Bridge B.
13; 14	Out 3; Out 4	Outputs of the Bridge B. The current that flows through the load connected between these two pins is monitored at pin 15.
—	N.C.	Not Connected

PINS AND DEFINITIONS OF ACM298N

四、BLOCK DIAGRAM

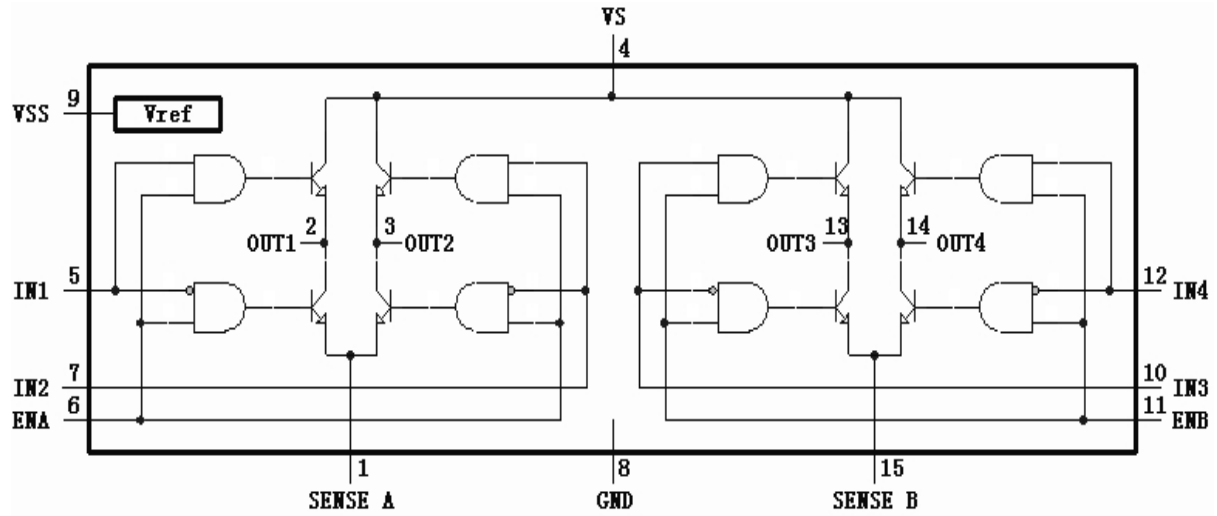

BLOCK DIAGRAM OF ACM298N

五、ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_S	Supply Voltage (pin 4)	Operative Condition	$V_{IH} + 2.5$		46	V
V_{SS}	Logic Supply Voltage (pin 9)		4.5	5	7	V
I_S	Quiescent Supply Current (pin 4)	$V_{en} = H; I_L = 0$		13	22	mA
		$V_i = L$		50	70	mA
		$V_i = H$				mA
I_{SS}	Quiescent Current from V_{SS} (pin 9)	$V_{en} = L$			4	mA
		$V_i = X$				mA
		$V_i = L$		24	36	mA
I_{SS}	Quiescent Current from V_{SS} (pin 9)	$V_i = H$		7	12	mA
		$V_{en} = L$			6	mA
		$V_i = X$				mA
V_{iL}	Input Low Voltage (pins 5, 7, 10, 12)		-0.3		1.5	V
V_{iH}	Input High Voltage (pins 5, 7, 10, 12)		2.3		V_{SS}	V
I_{iL}	Low Voltage Input Current (pins 5, 7, 10, 12)	$V_i = L$			-10	μA
I_{iH}	High Voltage Input Current (pins 5, 7, 10, 12)	$V_i = H \leq V_{SS} - 0.6V$		30	100	μA
$V_{en} = L$	Enable Low Voltage (pins 6, 11)		-0.3		1.5	V
$V_{en} = H$	Enable High Voltage (pins 6, 11)		2.3		V_{SS}	V
$I_{en} = L$	Low Voltage Enable Current (pins 6, 11)	$V_{en} = L$			-10	μA
$I_{en} = H$	High Voltage Enable Current (pins 6, 11)	$V_{en} = H \leq V_{SS} - 0.6V$		30	100	μA
$V_{CEsat(H)}$	Source Saturation Voltage	$I_L = 1A$	0.95	1.35	1.7	V
		$I_L = 2A$		2	2.7	V
$V_{CEsat(L)}$	Sink Saturation Voltage	$I_L = 1A$	0.85	1.2	1.6	V
		$I_L = 2A$		1.7	2.3	V
V_{CEsat}	Total Drop	$I_L = 1A$	1.80		3.2	V
		$I_L = 2A$			4.9	V
V_{sens}	Sensing Voltage (pins 1, 15)		-1		2	V

六、 APPLICATION

1、 POWER OUTPUT STAGE

The ACM298N integrates two power output stages (A ; B).The power output stage is a bridge configuration and its outputs can drive an inductive load in common or differenzial mode, depending on the state of the inputs. The current that flows through the load comes out from the bridge at the sense output : an external resistor (RSA ; RSB.) allows to detect the intensity of this current.

2、 INPUT STAGE

All the inputs are TTL compatible

3、 POWER

A non inductive capacitor, usually of 100 nF, must be foreseen between both Vs and Vss, to ground, as near as possible to GND pin.The en terminal shall be in L state before the output protection is turned off and on.

4、 OUTPUT PROTECTION

The fast diode shall be selected as the output protection when driving inductive load. When $I = 2\text{ A}$, $V_F \leq 1.2\text{ V}$, $TRR \leq 200\text{ ns}$.


5、 PARALLEL CONNECTION

When the driving current is greater than 2A, two groups can be connected in parallel for current expansion.


七、 DIMENSION

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			5			0.197
B			2.65			0.104
C			1.6			0.063
D		1			0.039	
E	0.49		0.55	0.019		0.022
F	0.66		0.75	0.026		0.030
G	1.02	1.27	1.52	0.040	0.050	0.060
G1	17.53	17.78	18.03	0.690	0.700	0.710
H1	19.6			0.772		
H2			20.2			0.795
L	21.9	22.2	22.5	0.862	0.874	0.886
L1	21.7	22.1	22.5	0.854	0.870	0.886
L2	17.65		18.1	0.695		0.713
L3	17.25	17.5	17.75	0.679	0.689	0.699
L4	10.3	10.7	10.9	0.406	0.421	0.429
L7	2.65		2.9	0.104		0.114
M	4.25	4.55	4.85	0.167	0.179	0.191
M1	4.63	5.08	5.53	0.182	0.200	0.218
S	1.9		2.6	0.075		0.102
S1	1.9		2.6	0.075		0.102
Dia1	3.65		3.85	0.144		0.152

外观及尺寸




Multiwatt15

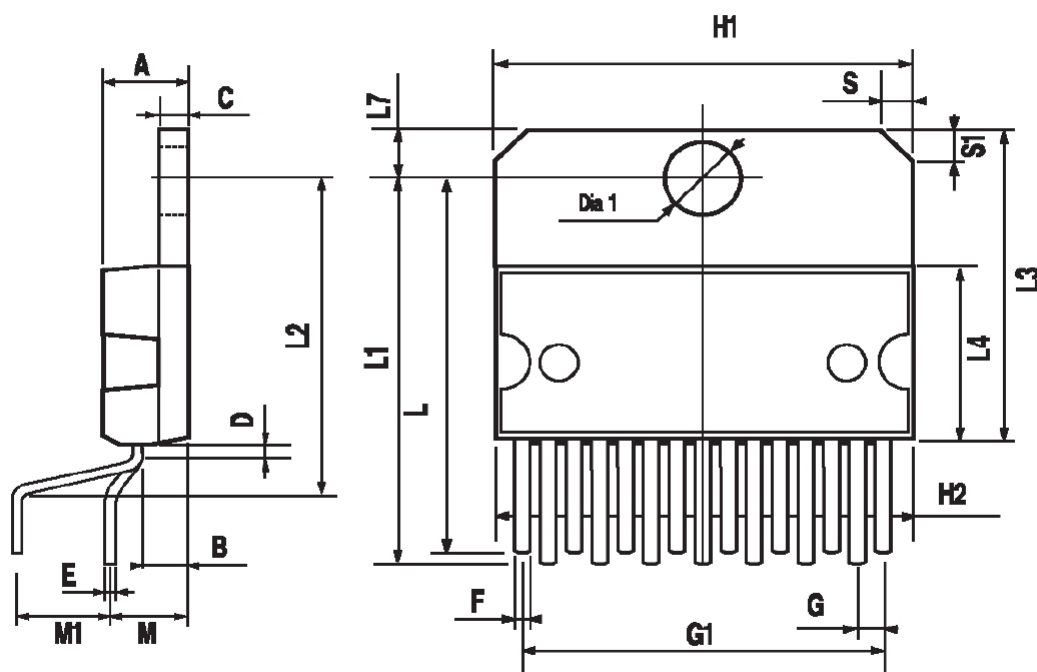

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			5			0.197
B			2.65			0.104
C			1.6			0.063
E	0.49		0.55	0.019		0.022
F	0.66		0.75	0.026		0.030
G	1.14	1.27	1.4	0.045	0.050	0.055
G1	17.57	17.78	17.91	0.692	0.700	0.705
H1	19.6			0.772		
H2			20.2			0.795
L		20.57			0.810	
L1		18.03			0.710	
L2		2.54			0.100	
L3	17.25	17.5	17.75	0.679	0.689	0.699
L4	10.3	10.7	10.9	0.406	0.421	0.429
L5		5.28			0.208	
L6		2.38			0.094	
L7	2.65		2.9	0.104		0.114
S	1.9		2.6	0.075		0.102
S1	1.9		2.6	0.075		0.102
Dia1	3.65		3.85	0.144		0.152

OUTLINE AND MECHANICAL DATA

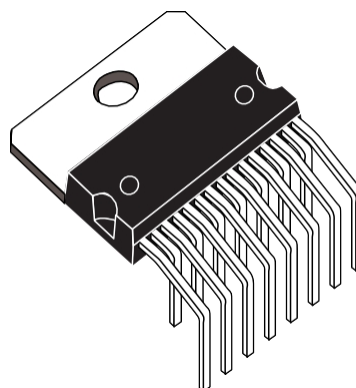

Multiwatt15 H

