

GP1A10/GP1A26LC

OPIC Photointerrupter with Connector

■ Features


1. Uses 3-pin connector teminl
2. Supply voltage range (V_{CC} : 21 to 26V)
3. High sensig accuracy (Slit width : 0.5mm)
4. Wide gap between light emitter and detector (5mm)
5. Connector towards upside (GP1A26LC)

■ Applications

1. Copiers, Printers
2. Facsimiles

■ Outline Dimensions

(Unit : mm)

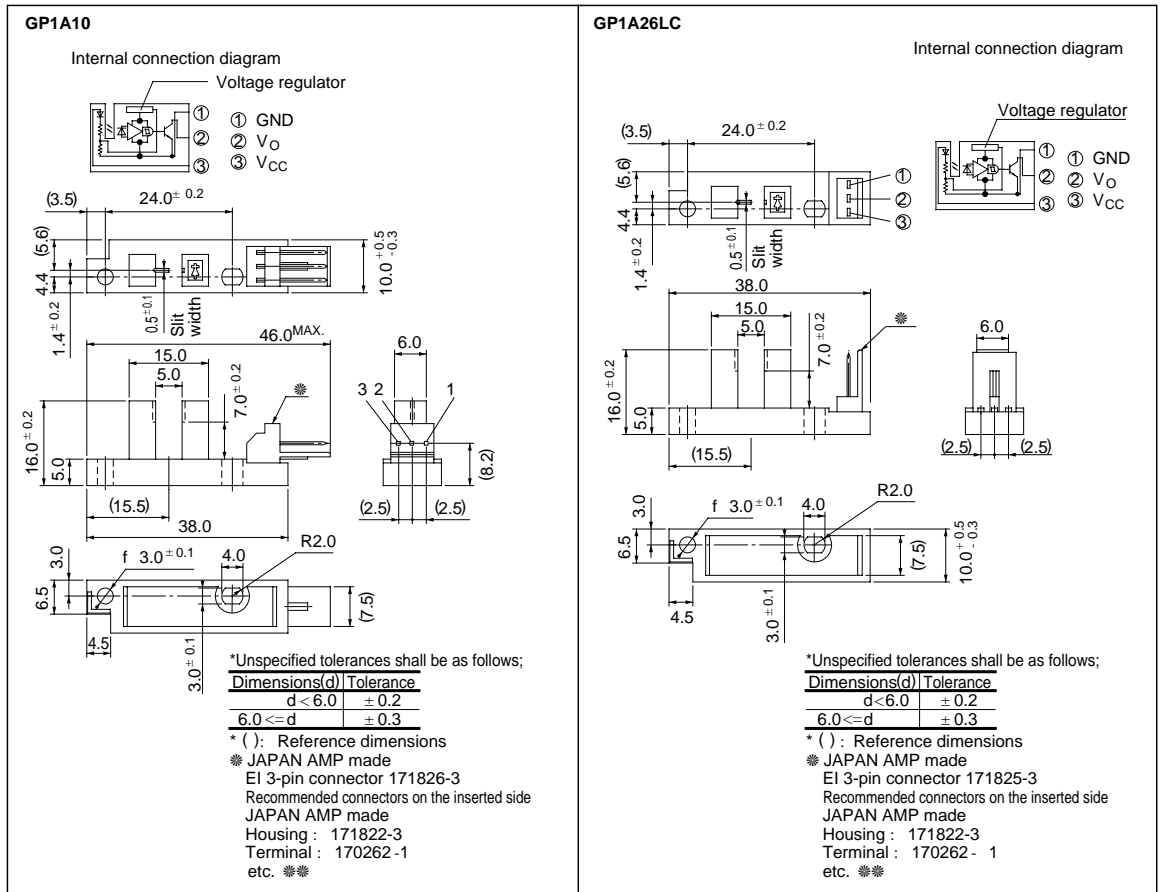

* "OPIC" (Optical IC) is a trademark of the SHARP Corporation. An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

※※ Recommended connectors on the inserted side(See674page).

Absolute Maximum Ratings

(Ta = 25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	- 0.5 to + 30	V
*1 Output voltage	V _O	- 0.5 to + 40	V
*2 Low level output current	I _{OL}	50	mA
*3 Operating temperature	GP1A10	T _{opr}	0 to + 80
	GP1A26LC		- 20 to + 80
*3 Storage temperature	T _{stg}	- 20 to + 95	°C
Operating humidity	R _H	10 to 95	%

*1 Collector-emitter voltage of output transistor

*2 Collector current of output transistor

*3 The connector should be plugged in/out at normal temperature.

Electro-optical Characteristics

(Unless otherwise specified V_{CC} = 24V, Ta = 25°C)

Parameter	Symbol	conditions	MIN.	TYP.	MAX.	Unit	
Operating supply voltage	V _{CC}	-	21	-	26	V	
Low level supply current	I _{CCL}	Light beam uninterrupted	-	-	30	mA	
Low level output voltage	V _{OL}	Light beam uninterrupted, I _{OL} = 16mA	-	-	0.6	V	
High level supply current	I _{CCH}	Light beam interrupted	-	-	30	mA	
High level output voltage	V _{OH}	Light beam interrupted, R _L = 10kΩ, V _{CC} = 26V	25.8	-	-	V	
Response characteristics	Minimum interruption time	t _H	Ta = 0 to 80°C, R _L = 4.7kΩ V _{CC} = 24V ± 5%	-	-	-	μs
	Minimum sensing time			t _L	166	-	-

Fig. 1 Low Level Output Current vs. Ambient Temperature

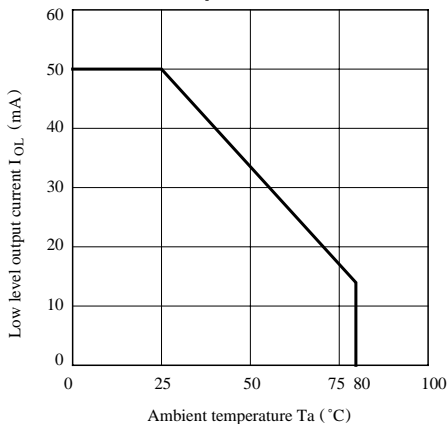


Fig. 2 Low Level Output Voltage vs. Low Level Output Current

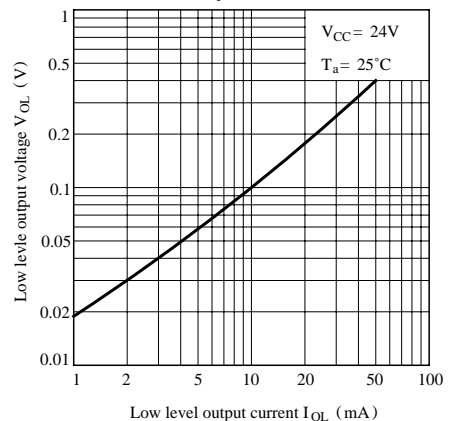


Fig. 3 Low Level Output Voltage vs. Ambient Temperature

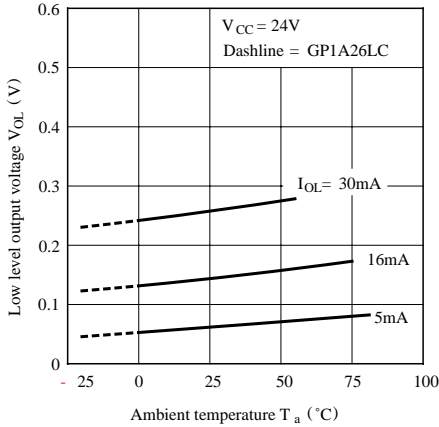


Fig. 4 Supply Current vs. Supply Voltage

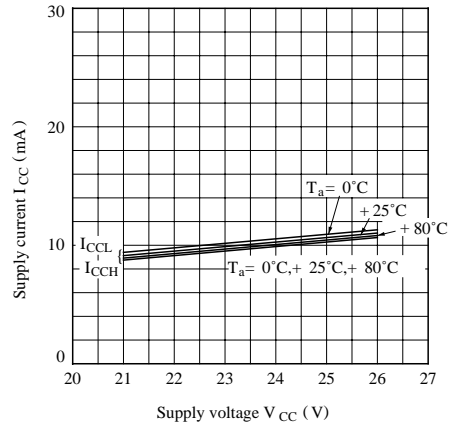


Fig. 5 Detecting Position Characteristics (1)


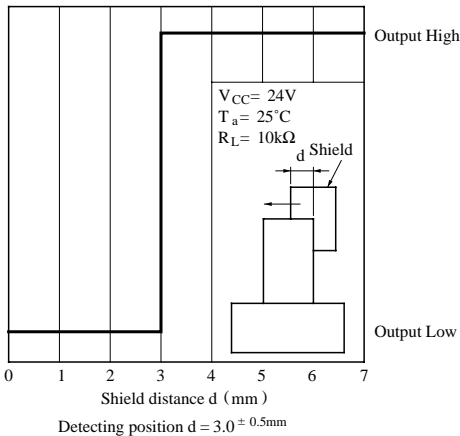


Fig. 6 Detecting Position Characteristics (2)

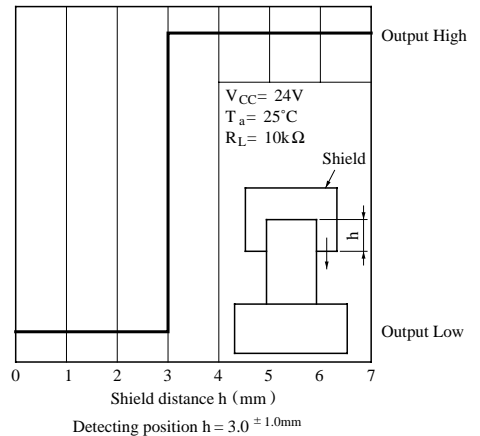

■ Recommended Connectors on the Inserted Side

● JAPAN AMP made EI series connectors (standard type)

Housing color	Natural color	Black	Blue	Green	Red
Housing Model No.	171822-3	2-171822-3	4-171822-3	6-171822-3	8-171822-3
Special terminal Model. No.	AWG size	Product shape	Material	Model No.	
	AWG 26 to 20	Bulk	Brass	170204-1	
			Copper phosphide	170204-2	
			Brass	170262-1	
		Chain	Copper phosphide	170262-2	
			Brass	170205-1	
			Copper phosphide	170205-2	
	AWG 30 to 26	Bulk	Brass	170263-1	
			Copper phosphide	170263-2	
		Chain	Brass	170263-1	
			Copper phosphide	170263-2	

● JAPAN AMP made EI series connectors (low profile type)

Housing color	Natural color	Black	Blue	Green	Red
Housing Model No.	172142-3	2-172142-3	4-172142-3	6-172142-3	8-172142-3
Special terminal Model. No. (Material: Copper phosphide)	AWG size	Product shape	Model No.		
	26 to 22	Bulk	170369-1		
		Chain	170354-1		
	30 to 26	Bulk	170370-1		
		Chain	170355-1		

● JAPAN AMP made EI series connectors (amp mass termination)

Housing-terminal united type connector	AWG28 (Green)	AWG26 (Natural color)	AWG24 (Black)	AWG22 (Red)
	172054-3	172053-3	172052-3	172051-3

※ Terminal Material: Copper phosphide

■ Precautions for Use

- (1) It is recommended that a by-pass capacitor of more than $0.01\mu\text{F}$ be added between V_{CC} and GND near the device in order to stabilize power supply line.
- (2) In this product, the PWB is fixed with a rear cover, and cleaning solvent may remain inside the case ; therefore, dip cleaning or ultrasonic cleaning is prohibited.
- (3) Remove dust or stains, using an air blower or a soft cloth moistened in cleaning solvent. However, do not perform the above cleaning using a soft cloth with cleaning solvent in the marking portion.
In this case, use only the following type of cleaning solvent used for wiping off:
Ethyl alcohol, Methyl alcohol, Isopropyl alcohol, Freon TE, Freon TF, Diflon solvent S3-E
When the cleaning solvents except for specified materials are used, please consult us.
- (4) As for other general cautions, refer to the chapter “Precautions for Use”.