

KBP301 THRU KBP307

Voltage Range 50 to 1000 Volts Current 3.0 Amperes

<p>Features</p> <ul style="list-style-type: none"> ✧ UL Recognized File # E-96005 ✧ Ideal for printed circuit board ✧ Reliable low cost construction technique results in inexpensive product ✧ High temperature soldering guaranteed: 250°C / 10 seconds at 5 lbs. (2.3 Kg) tension ✧ Small size, simple installation Leads solderable per MIL-STD-202, Method 208 	<div style="text-align: center;"> <p>KBP</p> </div> <p style="text-align: center;">Dimensions in inches and (millimeters)</p>
---	---

Maximum Ratings and Electrical Characteristics
 Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number	KBP 301	KBP 302	KBP 303	KBP 304	KBP 305	KBP 306	KBP 307	Units	
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current @ T _A = 50°C								3.0	A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)								80	A
Maximum Instantaneous Forward Voltage @ 3.14A								1.1	V
Maximum DC Reverse Current @ T _A =25°C at Rated DC Blocking Voltage @ T _A =125°C								10 500	µA µA
Typical Thermal Resistance (Note 1) R _{θJA} R _{θJL}								30.0 11	°C/w
Operating Temperature Range T _J								-55 to +150	°C
Storage Temperature Range T _{STG}								-55 to +150	°C

RATINGS AND CHARACTERISTIC CURVES (KBP301G THRU KBP307G)

FIG.1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

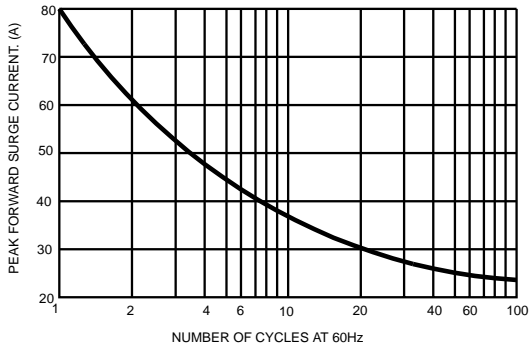


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

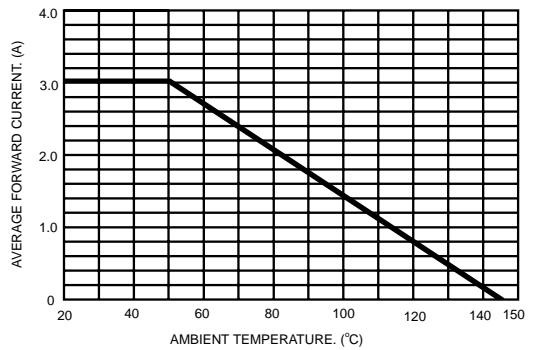


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

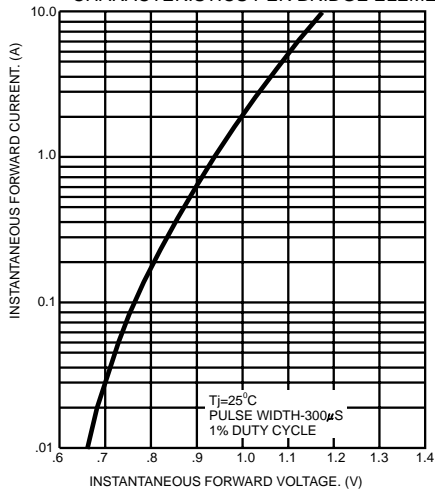


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

