




MBRF20200ACT

Features

- Low forward voltage drop
- High frequency properties and switching speed
- Guard ring for over-voltage protection



1. Anode 2. Cathode 3. Anode

TO-220F

Absolute Maximum Ratings (per diode) $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Value	Units
V_{RRM}	Maximum Repetitive Reverse Voltage	200	V
V_R	Maximum DC Reverse Voltage	200	V
$I_{F(AV)}$	Maximum Average Rectified Current @ $T_C = 105^\circ\text{C}$	20	A
I_{FSM}	Maximum Forward Surge Current (per diode) 60Hz Single Half-Sine Wave	150	A
T_J, T_{STG}	Operating Junction and Storage Temperature	-65 to +150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Value	Units
$R_{\theta JC}$	Maximum Thermal Resistance, Junction to Case (per diode)	2.0	$^\circ\text{C}/\text{W}$

Electrical Characteristics (per diode) $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Min.	Typ.	Max.	Units		
V_{FM}^*	Maximum Instantaneous Forward Voltage			$T_C = 25^\circ\text{C}$	V		
				$I_F = 10\text{A}$		-	0.85
				$I_F = 10\text{A}$		-	0.72
				$I_F = 20\text{A}$		-	-
I_{RM}^*	Maximum Instantaneous Reverse Current (per diode) @ rated V_R			$T_C = 25^\circ\text{C}$	mA		
				$T_C = 125^\circ\text{C}$		-	0.1

* Pulse Test: Pulse Width=300 μs , Duty Cycle=2%

Typical Characteristics

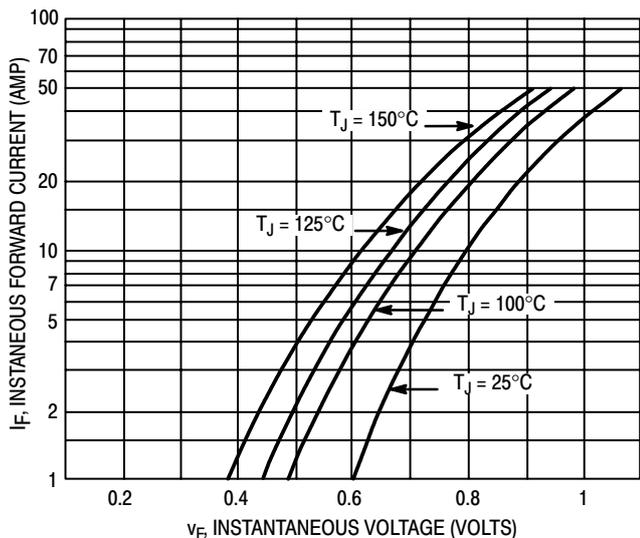


Figure 1. Typical Forward Voltage (Per Leg)

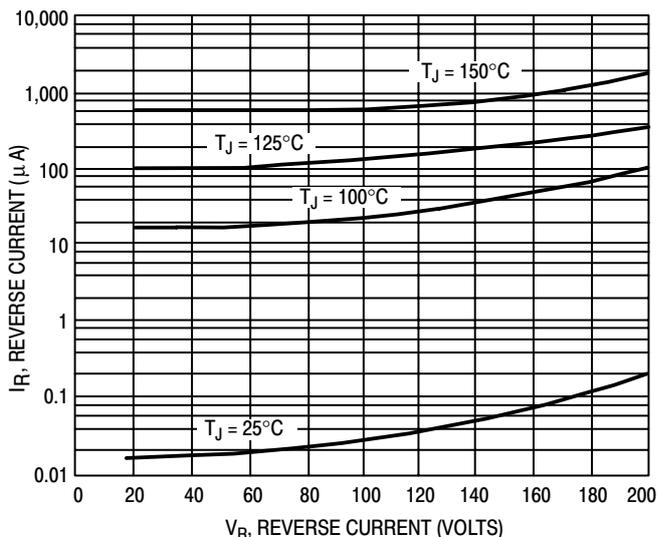


Figure 2. Typical Reverse Current (Per Leg)

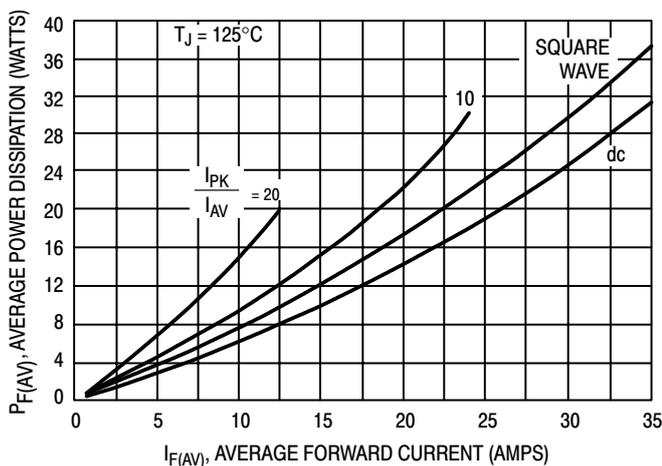


Figure 3. Forward Power Dissipation

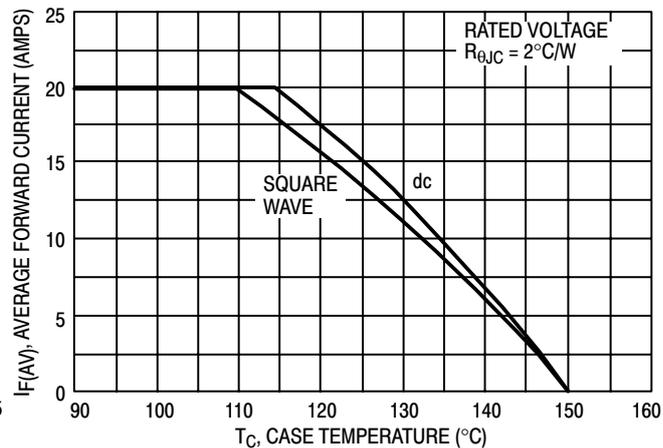


Figure 4. Current Derating, Case

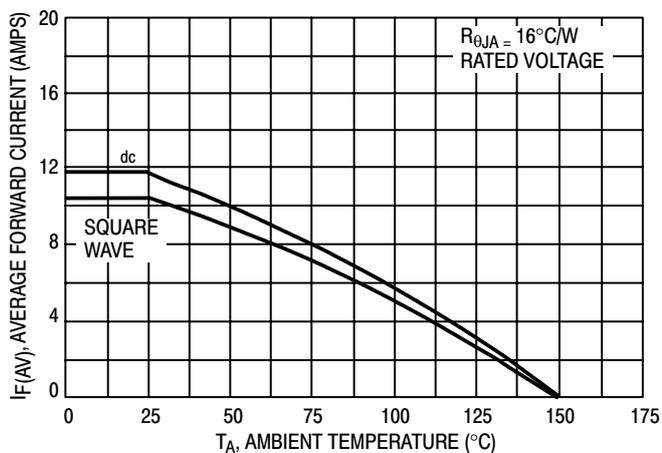


Figure 5. Current Derating, Ambient


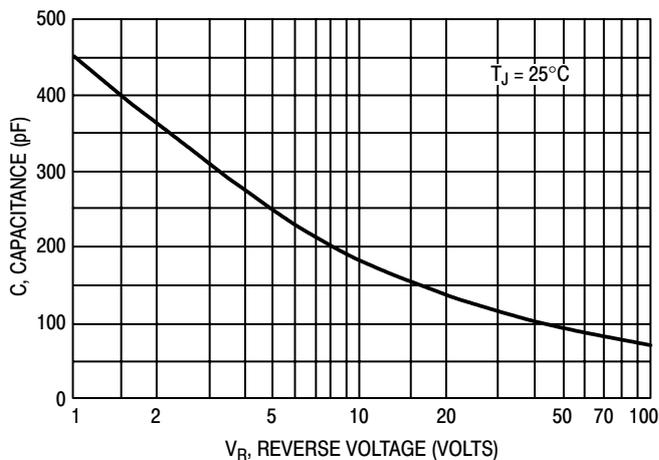


Figure 6. Typical Capacitance (Per Leg)

Package Dimension

TO-220F

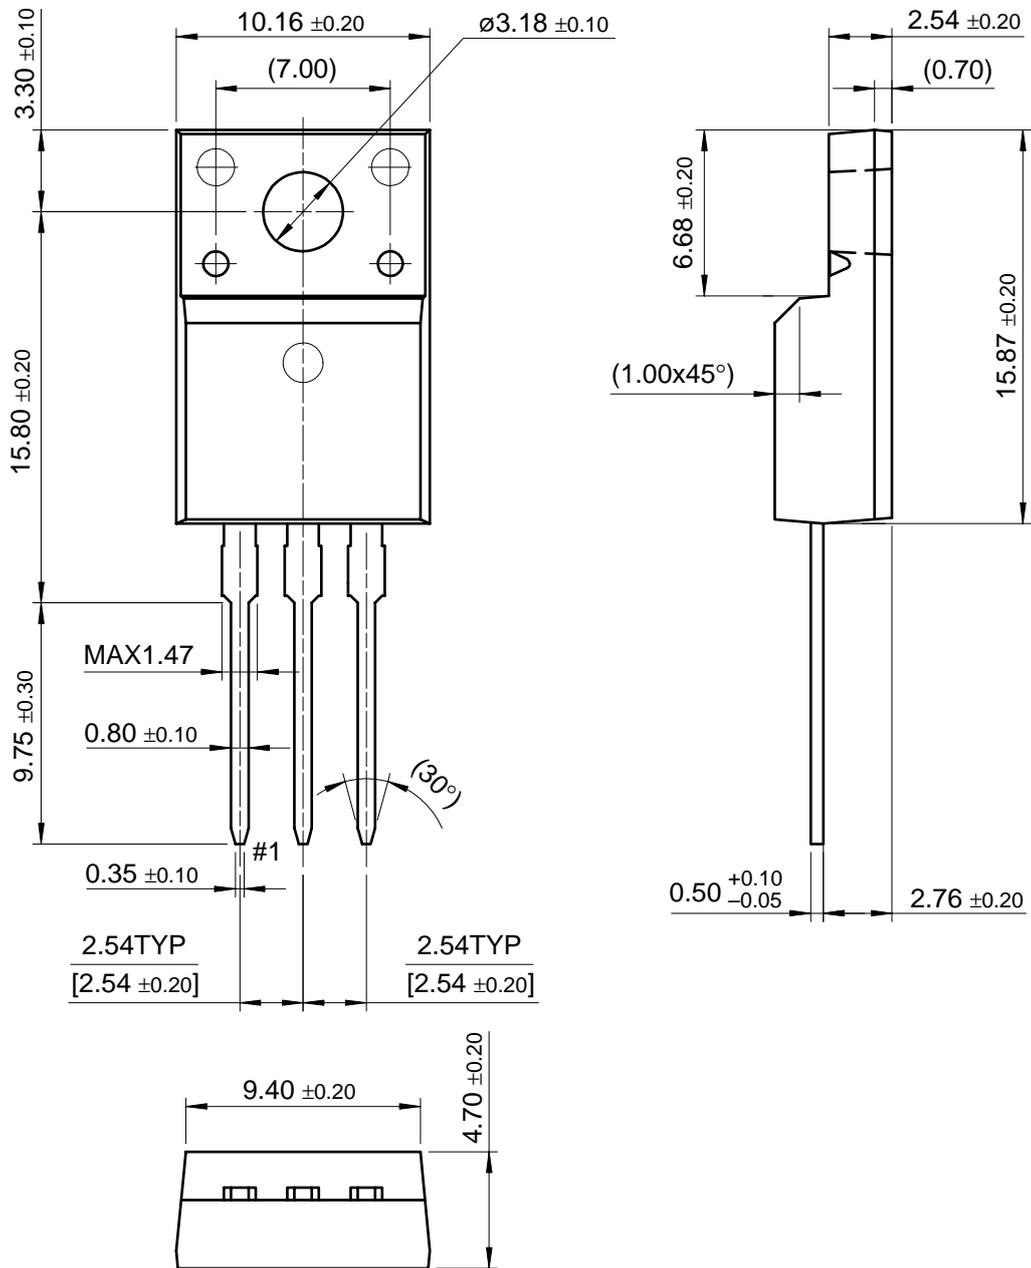

Dimensions in Millimeters